



## AC-55a : Switching of electric discharge lamp controls

**Overload currents:  $I_d = 10 \times I_n$  during 10ms**

**Overload voltage :  $U = 1.1$  up to  $2 \times U_n$**

**precautions :**


**use 400VAC SSRs on 230VAC lines**

**( when there is a capacitor at the input of the load used for EMC )**



**Signs**

**Lighting**

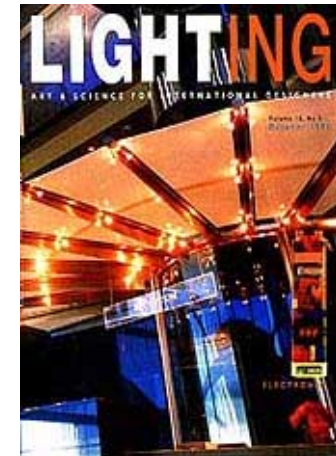

### Zero cross SSRs

**SK/XK range**



**SC8 range**



**SV8**



**Illuminations**